



ROD-KNUCKLE™ ENVIRONMENTAL BOP STUFFING BOX

Through extensive research and comprehensive field testing, Nelgar Services Inc. has designed a patented **Rod-Knuckle™ Environmental BOP Stuffing Box**.

The **Rod-Knuckle™** features the following advantages over other major competitors’.

Features	Benefits
Dual packing	Superior environmental protection - the top (secondary) packing provides a positive seal when the bottom (primary) packing fails.
Self-aligning knuckle	Reduce side loading on top packing - the top packing rotates with the polished rod when a misalignment exists.
Check valve	Prevent costly blowouts – specially constructed for exceptional strength, the check valve closes in the event of a polished rod failure and provides a reliable shut-off.
Optional pressure shut-down switch	Early detection of bottom packing failure – utilize control chamber pressure resulting from a bottom (primary) packing failure.
Optional lubrication systems	Prolong packing life – self contained Knuckle Buddy and Swedge lubrication systems.
Quick and easy maintenance (easiest in industry)	Reduce expenses and save time – wearable parts can be easily replaced without lifting any components of the Rod-Knuckle™ over the polished rod.
Low profile, light weight and rugged	Build to last, easy to install and maintain. “NOT YOUR WEAK LINK”

The **Rod-Knuckle™ Environmental BOP Stuffing Box** is tested to 10,500 psi. It withstands 42,000 lbs top load without crushing the top and bottom packing. The check valves are specially constructed for exceptional strength. Its unique **knuckle** design allows the top (secondary) packing to rotate with the polished rod when a misalignment exists. The **Rod-Knuckle™** can also be utilized as an alignment tool. It is suitable for regular, sour and high temperature services.



The **Rod-Knuckle™** is a cost effective and durable wellhead accessory designed to protect and preserve the environment. Its operation is simple and reliable.

SPECIFICATIONS

Size polished rod: 1-1/2", 1-1/4"
 flow tee connection: 2-3/8" EUE, 2-7/8" EUE, 3-1/2" EUE, 3" API line pipe
 flange connection: (2-9/16"-5M-R27) (3-1/8"-3M-R31) (5 1/8"-3M-R41)

Pressure (psi) 3,000 (tested to 10,500 psi)
 Top load (lbs) 42,000 maximum (without crushing top and bottom packing)
 Operating Temperature (°F) -50 and up


Dimensions 16.5"H x 5.5"OD
 Weight 45 lbs

Material body 4140 HTSR steel (heat treated stress relief)
 check valve regular services – Delrin® 511P NC010 acetal resin
 sour services – Delrin® 511P NC010 acetal resin
 high temperature services – 6061-T6 aluminum (solution heat treated and artificially aged)
 sour high temperature services – PEEK™ polymer
 brass rings ASTM B505-08
 packing available for different services and applications

- * Exceeded PSAC IRP Minimum Wellhead Requirements
- ** Passed ASTM A370 Standard Test for Mechanical Testing of Steel Products



Flow Tee Connection Model

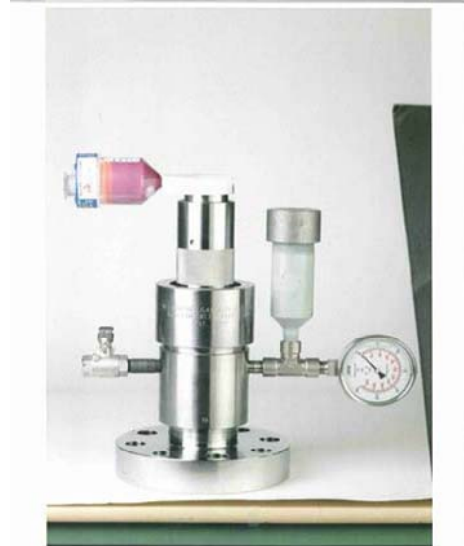

Flange Connection Model



Rod Knuckle™ Model 1218 Operation Diagram

Two places to use spanner wrench for access to the packing.

Two thumb screws must also be loosened for access to the packing. They must be re-tightened after each service. (finger-tight only)

Set-screw is used to secure knuckle


Oil Chamber

Pressure Gauge

Top View of Control Chamber with Check Valve Inserted



Flow Tee Adapter with O-Ring

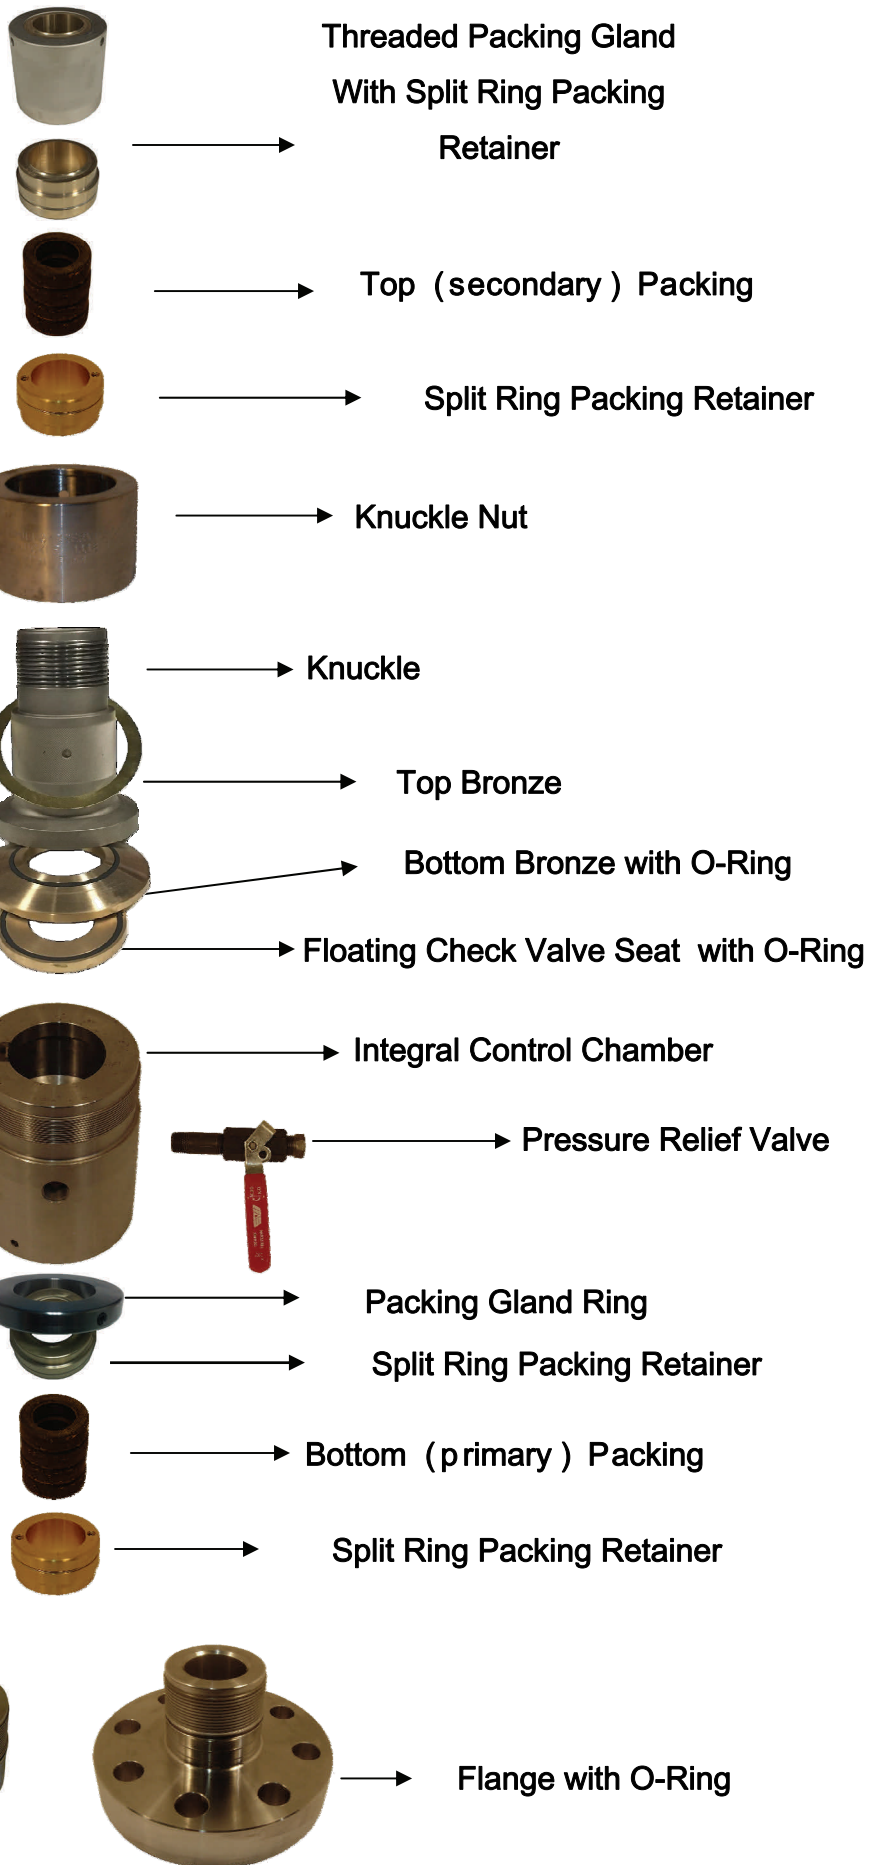



INDUSTRY AT A GLANCE

Feature	Nelgar Rod-Knuckle™	Red Wing Super B7	Opal HF	Dura PCCV	Hercules PCSB	Production Safety HT
Dual packing	√	√	√	√	√	X
Different packing required	X (same for both)	X	√ (2 different types)	√ (2 different types)	√ (3 different types)	N/A
Top load crushes packing	X	X	√	X	√	X
Rotating top packing and side loading relief	√	X	X	X	X	X
Integral BOP (check valve incorporated)	√ (1 piece)	√ (1 piece)	3 pieces (sold separately)	2 pieces (sold separately)	Add-on required (sold separately)	√ (1 piece)
Check valve causes damage to polished rod	X	√	√	√	√	√
Rated pressure (psi)	3,000	2,500	2,500	2,000	1,500	3,000
Testing pressure (psi)	10,500	5,000	4,000	4,000	N/A	N/A
Operating temperature (°F)	-50 and up	-40 and up	-15 and up	-15 and up	-15 and up	-40 and up
Pressure shut-down switch	√	√	X	√	X	X
Lubrication systems	√	X	X	X	X	X
Easy access to check valve and change parts	√	X	X	X	X	X
Height (in)	16.5	20.4	24.5	25	33	12
Weight (lbs)	45	85	70	65	112	45
Main body material	4140 HTSR** steel	4140 steel	ductile* steel	ductile* steel	ductile* iron	4140 steel

* PSAC IRP 5.2.4 – Wellhead equipment manufactured from ductile iron is not suitable for use in western Canada when exposed to extremely low ambient temperatures.

** HTSR - heat treated stress relief